

**New
True SMD Package**


SaRonix

Crystal Clock Oscillator

3.3 & 5V, High Frequency, ECL

Technical Data

SEL24xx / SEL25xx Series

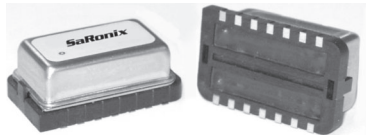

Description

A crystal controlled, high frequency, highly stable oscillator, compatible with Motorola 10KH, 10KE or 100LVE logic families. The output can be disabled and wired-OR for testing or combining multiple clocks. Open emitter output allows the user to select the load termination to optimize performance. Complementary outputs are available.

Applications & Features

- SONET/ATM/SDH - 155.5200 MHz
- Forward Error Correction (FEC) - 166.6285 MHz
- Gigabit Ethernet - 125.0000 MHz
- Fibre Channel - 106.2500 MHz
- Ideal for high resolution graphics & imaging applications
- Provides 10KH and 10KE (Motorola ECLinPS) compatible outputs
- 3.3V PECL versions are LVDS compatible
- Disable/wired-OR output feature and complementary output are available
- Superior stability with AT-cut crystal performance compared to SAW technology
- Fundamental or overtone crystal operation results in superior jitter characteristics over PLL implementations
- True SMD DIL 14 version available

Frequency Range:	7 MHz to 200 MHz
Frequency Stability:	±20, ±25, ±50 or ±100 ppm over all conditions: calibration tolerance, operating temperature, input voltage change, load change, aging, shock and vibration.
Temperature Range:	Operating: 0 to +70°C or -40 to +85°C Storage: -55 to +125°C
Supply Voltage:	5.0V or -5.2V, 3.3V PECL
Supply Current:	48mA typ / Complementary 45mA typ / E/D (40mA/Disabled) 43mA typ / Single Output 80mA max
Output Drive:	Symmetry: 45/55% max @ V _{BB} or Complementary Outputs Crossing Rise & Fall Times: 1ns typ, 3ns max 20% to 80% for 10KH Logic 350ps typ, 550ps max 20% to 80% for 10KE Logic Logic 0: V _{CC} -1.595 max, 0 to +70°C V _{CC} -1.595 max, -40 to +85°C Logic 1: V _{CC} -1.02 min, 0 to +70°C V _{CC} -1.08 min, -40 to +85°C Load: 50Ω to V _{CC} -2V Jitter: 3.5ps max RMS period jitter, 1ps max 1σ cycle-to-cycle jitter
Mechanical:	Shock: MIL-STD-883, Method 2002, Condition B Solderability: MIL-STD-883, Method 2003 Terminal Strength: MIL-STD-883, Method 2004, Conditions B2 Vibration: MIL-STD-883, Method 2007, Condition A Solvent Resistance: MIL-STD-202, Method 215 Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition A, B or C (I or J for Gull Wing)
Environmental:	Gross Leak Test: MIL-STD-883, Method 1014, Condition C Fine Leak Test: MIL-STD-883, Method 1014, Condition A2 Thermal Shock: MIL-STD-883, Method 1011, Condition A Moisture Resistance: MIL-STD-883, Method 1004

Part Numbering Guide

SEL 2410 B - 106.2500

Series ECL/PECL

Type= Voltage/Logic	Pin 1 Function	Frequency (MHz)
2410= +5.0V / 10KH	Enable	7 to 133.3333
2411= +5.0V / 10KH	\bar{Q} Comp	7 to 200.0000
2412= +5.0V / 10KH	No Connect	7 to 133.3333
2430= +3.3V / 10KE	Enable	84 to 200.0000
2431= +3.3V / 10KE	\bar{Q} Comp*	25 to 200.0000
2432= +3.3V / 10KE	No Connect	25 to 200.0000
2511= -5.2V / 10KH	\bar{Q} Comp*	7 to 200.0000
2512= -5.2V / 10KH	No Connect	7 to 133.3333

Frequency (MHz)

Blank = Thru-hole
K = Gull Wing Package
S = True SMD Adaptor (see product photo)

Stability Tolerance

AA = ±20 ppm, 0 to +70°C
A = ±25 ppm, 0 to +70°C
B = ±50 ppm, 0 to +70°C
C = ±100 ppm, 0 to +70°C
E = ±50 ppm, -40 to +85°C
F = ±100 ppm, -40 to +85°C

* \bar{Q} Complementary - both outputs require termination

DS-217 REV B

