


| PKG. DIMENSIONS(MM) | | | |
|---------------------|----------|------|------|
| SYMBOL | MIN | NOM | MAX |
| A | 0.40 | - | 0.50 |
| A1 | 0.00 | - | 0.05 |
| A3 | 0.125REF | | |
| D | 0.75 | 0.80 | 0.85 |
| E | 0.75 | 0.80 | 0.85 |
| D2 | 0.15 | 0.25 | 0.35 |
| E2 | 0.15 | 0.25 | 0.35 |
| b | 0.15 | 0.20 | 0.25 |
| L | 0.15 | 0.20 | 0.25 |
| e | 0.48 BSC | | |

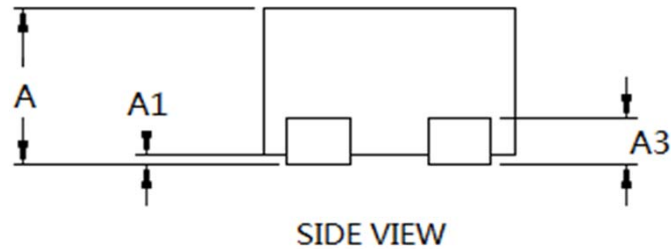

Note:

1) Controlling dimensions in millimeters.

PT Pericom Technology Inc.

Pericom Technology (Shanghai) Co.Ltd.
3/F., 20 Building ,481 Gui Ping Road, Shanghai,200233
Tel:(86-21)6485-0576. Fax: (86-21)6485-2181

DESCRIPTION: 4 Pin, UDFN 0.8*0.8

PACKAGE CODE: XY