Obsolete - Part Discontinued








PI3C32X245

2.5V/3.3V, High Bandwidth, Hot Insertion 16-Bit, 2-Port, Bus Switch

Features

- → Near-Zero propagation delay
- → 5-ohm switches connect inputs to outputs
- → Permits Hot Insertion
- → Capable of Hot-Swapping
- → 5V I/O Tolerant
- → 2.5V Supply Voltage Operation
- → Rail-to-Rail 3.3V or 2.5V Switching
- → High Bandwidth Operation (>400 MHz)
- → Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- → Halogen and Antimony Free. "Green" Device (Note 3)
- → Packaging (Pb-free & Green):
 - 40-pin, 150-mil-wide plastic BQSOP (B)


Block Diagram

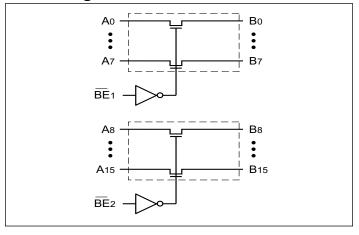

Description

Diodes' PI3C32X245 is a 2.5V or 3.3V 16-bit, 2-port bus switch designed with a low On-Resistance (5-ohm) allowing inputs to be connected directly to outputs. The bus switch creates no additional propagational delay or additional ground bounce noise. The switches are turned ON by the Bus Enable ($\overline{\rm BE}_{\rm N}$) input signal. It is very useful in switching signals that have high bandwidth (>400 MHz).

Pin Configuration

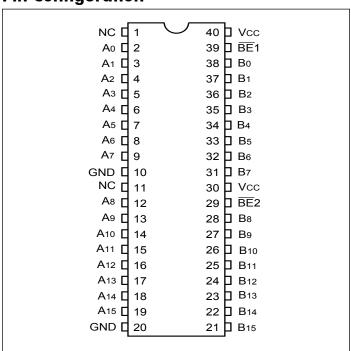

Truth Table(1)

Function	\overline{BE}_{N}	A0-15
Disconnect	Н	Hi-Z
Connect	L	B0-15

Note: H = High Voltage Level
L = Low Voltage Level
Hi-Z = High Impedance

Pin Description

Pin Name	Description
$\overline{\mathrm{BE}}_{\mathrm{N}}$	Bus Enable Input (Active LOW)
A0-15	Bus A
B0-15	Bus B

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.





Absolute Maximum Ratings

Parameter	Min.	Max.	Units
Storage Temperature		150	°C
Ambient Temperature with Power Applied	-40	85	°C
Supply Voltage to Ground Potential (Inputs & V _{CC} Only)		4.6	V
Supply Voltage to Ground Potential (Outputs & D/O Only)		4.6	V
DC Input Voltage		5.5	V
DC Output Current		120	mA
Power Dissipation	-	0.5	W

Stress beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

DC Electrical Characteristics (Over the Operating Range, $T_A = -40$ °C to +85°C, $V_{CC} = 3.3$ V ± 10 %)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ. (2)	Max.	Units
V_{IH}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			V
V _{IL}	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5		0.8	V
I _{IH}	Input HIGH Current	V _{CC} = Max., V _{IN} = V _{CC}			±1	
I _{IL}	Input LOW Current	V _{CC} = Max., V _{IN} = GND			±1	μΑ
I _{OZH}	High Impedance Output Current	$0 \le A, B \le V_{CC}$			±1	
V _{IK}	Clamp Diode Voltage	$V_{CC} = Min., I_{IN} = -18 \text{ mA}$		-0.73	-1.2	V
R _{ON}	Conitale On Project on a (4)	$V_{CC} = Min., V_{IN} = 0.0V, I_{ON} = 48mA$		5	7	0
	Switch On Resistance ⁽⁴⁾	$V_{CC} = Min., V_{IN} = 2.4V, I_{ON} = 15mA$		8	15	Ω

Capacitance ($T_A = 25^{\circ}C$, f = 1 MHz)

Parameters ⁽⁵⁾	Description	Test Conditions	Тур.	Units
C_{IN}	Input Capacitance	$V_{\rm IN} = 0V$	3.5	pF
C _{OFF}	A/B Capacitance, Switch Off	$V_{IN} = 0V$	5.0	pF
Con	A/B Capacitance, Switch On	$V_{IN} = 0V$	10.0	pF

Notes:

- $1. For Max. \ or Min. \ conditions, use appropriate value \ specified \ under \ Electrical \ Characteristics \ for \ the \ applicable \ device \ type.$
- 2. Typical values are at $V_{CC} = 3.3V$, $T_A = 25$ °C ambient and maximum loading.
- 3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
- 4. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.





Power Supply Characteristics

Parameters	Description	Test Co	onditions ⁽¹⁾	Min.	Typ.(2)	Max.	Units
I_{CC}	Quiescent Power Supply Current	$V_{CC} = Max.$	$V_{IN} = GND \text{ or } V_{CC}$		0.5	1.0	A
ΔI_{CC}	Supply Current per Input HIGH	$V_{CC} = Max.$	$V_{\rm IN} = 3.0 V^{(3)}$			2.5	mA

Notes

- 1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
- 2. Typical values are at Vcc = 3.3V, +25°C ambient.
- 3. Per TTL driven input (control input only); A and B pins do not contribute to $\Delta I {\it cc.}$

Switching Characteristics over 3.3V Operating Range

			P13C3	2X245	
			Co	m.	
Parameters	Description	Test Conditions	Min.	Max.	Units
t _{PLH} t _{PHL}	Propagation Delay ^(2,3) Ax to Bx	$C_L = 50 \text{ pF}$ $R_L = 500\Omega$		0.25	
t _{PZH} t _{PZL}	Bus Enable Time BE to Ax or Bx	$C_L = 50 \text{ pF}$	1.5	6.5	ns
t_{PHZ} t_{PLZ}	Bus Disable Time BE to Ax or Bx	$R_{L} = 500\Omega$ $R = 500\Omega$	1.5	5.5	

Switching Characteristics over 2.5V Operating Range


			P13C3	2X245	
			Co	om.	
Parameters	Description	Test Conditions	Min	Max	Units
t _{PLH} t _{PHL}	Propagation Delay ^(2,3) Ax to Bx	$C_L = 50 \text{ pF}$ $R_L = 500\Omega$		0.25	
t _{PZH} t _{PZL}	Bus Enable Time BE to Ax or Bx	$C_L = 50 \text{ pF}$	1.5	9.8	ns
t _{PHZ} t _{PLZ}	$\frac{\text{Bus Disable Time}}{\overline{\text{BE}} \text{ to Ax or Bx}}$	$R_{L} = 500\Omega$ $R = 500\Omega$	1.5	8.3	

Notes:

- 1. See test circuit and waveforms.
- 2. This parameter is guaranteed but not tested on Propagation Delays.
- 3. The bus switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.





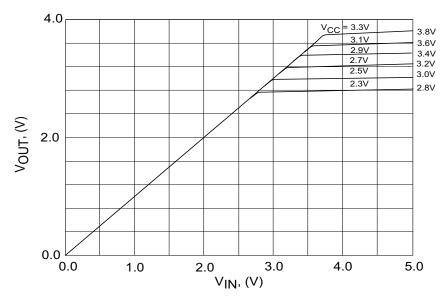

Output Voltage vs. Input Voltage over Various Supply Voltages

Part Marking



YY: Date Code (Year)

WW: Date Code (Workweek)
1st X: Assembly Site Code


2nd X: Fab Site Code

The Bar above "I" means Fab3 of MGN





Packaging Mechanical: 40-BQSOP (B)

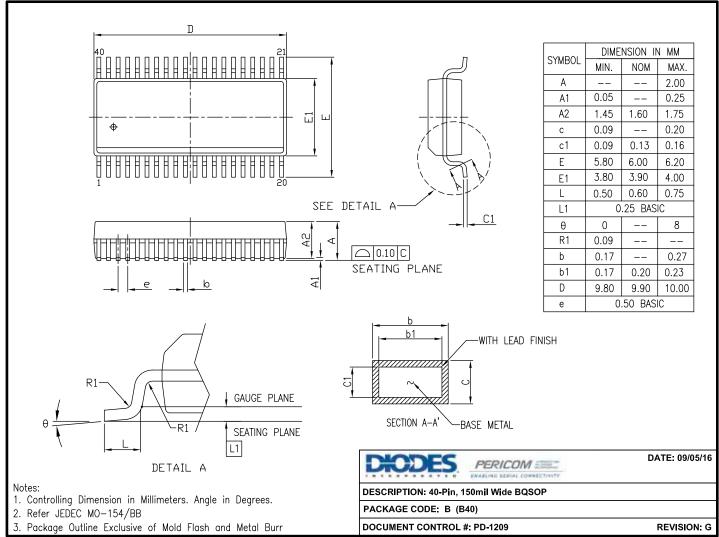

16-0176

For latest package info.

 $please\ check:\ http://www.diodes.com/design/support/packaging/pericom-packaging/packaging-mechanicals-and-thermal-characteristics/packaging/packaging-mechanicals-and-thermal-characteristics/packaging-pac$

Ordering Information

Ordering Code	Package Code	Package Description
PI3C32X245BEX	В	40-pin, 150mil Wide (BQSOP)

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

5

- 4. E = Pb-free and Green
- 5. X suffix = Tape/Reel





IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated www.diodes.com